



water testing instruments

ORP

TDS

pH

Your first step to the PERFECT water®



Conductivity

Temperature

LINE ID:neonicstool



ติดต่อบริษัท เนโอนิคส์ จำกัด

Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th

General Catalog

Handhelds: TDS/EC

| | ZT-2 | TDS-EZ | TDS-3 | EC-3 |
|--------------|--|---|---|---|
| |  |  |  |  |
| | <ul style="list-style-type: none"> • Retail economy model • Reliable meter at an unbeatable price • Auto shut-off • New "HMD" line | <ul style="list-style-type: none"> • Economy model ideal for end-users • Fun, translucent blue housing • Excellent as a promotional item • Includes a TDS chart on the back of the meter • Auto shut-off | <ul style="list-style-type: none"> • Ideal for commercial use, with vinyl carrying case and belt clip • Includes digital thermometer • Hold function stores readings outside of the water; Auto-off function conserves battery power • Large, easy-to-read display • Strong, durable plastic | <ul style="list-style-type: none"> • Ideal for commercial use, with vinyl carrying case and belt clip • Includes digital thermometer • Hold function stores readings outside of the water; Auto-off function conserves battery power • Large, easy-to-read display • Strong, durable plastic |
| TDS/EC RANGE | 0-999 ppm (mg/L) | 0-9990 ppm (mg/L) | 0-9990 ppm (mg/L) | 0-9990 μ S (μ S/cm) |
| TEMP. RANGE | n/a | n/a | 1-80°C | 1-80°C |
| ATC | Yes | n/a | Yes | Yes |
| ACCURACY | +/- 3% | +/- 3% | +/- 2% | +/- 2% |
| RESOLUTION | 1 ppm | 1 ppm | 1 ppm | 1 μ S |
| CALIBRATION | Analog to any point | Analog to any point | Analog to any point | Analog to any point |
| POWER SOURCE | 2 x 1.5V button cell | 2 x 1.5V button cell | 2 x 1.5V button cell | 2 x 1.5V button cell |
| DIMENSIONS | 14x2.3x1.5 cm (5.5x.9x.75 in.) | 15.5x3.1x2.3 cm (6.1x1.25x1 in.) | 15.5x3.1x2.3 cm (6.1x1.25x1 in.) | 15.5x3.1x2.3 cm (6.1x1.25x1 in.) |
| WEIGHT | 31.2 g (1.1 oz) | 56.7 g (2 oz) | 76.5 g (2.7 oz) (with case) | 76.5 g (2.7 oz) (with case) |
| |  |  |  |  |

**The most popular
handheld TDS testers
in the world**













ติดต่อบริษัท เนโอนิกส์ จำกัด

Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th



| TDS-4 | TDS-4TM | AP-1: AquaPro | AP-2: AquaPro | COM-100 |
|--|--|---|--|--|
|  |  |  |  |  |
| <ul style="list-style-type: none"> • The smallest and lightest TDS meter on the market • Sleek pocket design is perfect for personal or consumer use • Includes hold function, auto-off function, ATC, large display, and factory calibration • Advanced microprocessor technology | <ul style="list-style-type: none"> • The smallest and lightest TDS meter on the market • Sleek pocket design is perfect for personal or consumer use • Includes hold function, auto-off function, ATC, large display, and factory calibration • Advanced microprocessor technology | <ul style="list-style-type: none"> • Upscale retail TDS meter • Modern, splashproof design • Large LCD and digital calibration • Includes a TDS chart on the back of the meter and a magnetic housing • Four-digit display | <ul style="list-style-type: none"> • Upscale retail EC meter • Modern, splashproof design • Large LCD and digital calibration • Includes an EC chart on the back of the meter and a magnetic housing • Four-digit display | <ul style="list-style-type: none"> • Professional waterproof EC/TDS meter • Three EC-to-TDS conversion factors • Four scales: μS, mS, ppm, ppt • Pinpoint accuracy: resolution of 0.1 • Digital calibration and replaceable electrode |
| 0-9990 ppm (mg/L) | 0-9990 μS ($\mu\text{S}/\text{cm}$) | 0-5000 ppm (mg/L) | 0-9999 μS ($\mu\text{S}/\text{cm}$) | 0-9990/9.99 $\mu\text{S}/\text{mS}$; 0-8560/8.56 ppm/ppt |
| n/a | 1-80°C | 1-80°C / 33-176°F | 1-80°C / 33-176°F | 1-80°C / 33-176°F |
| Yes | Yes | Yes | Yes | Yes |
| +/- 2% | +/- 2% | +/- 2% | +/- 2% | +/- 2% |
| 1 ppm | 1 ppm | 1 ppm | 1 μS | 0.1 μS ; 0.01 mS; 0.1 ppm; 0.01 ppt |
| Analog to any point | Analog to any point | Digital to any point | Digital to any point | Digital to any point |
| 2 x 1.5V button cell | 2 x 1.5V button cell | 1 x 3V button cell | 1 x 3V button cell | 3 x 1.5V button cell |
| 14 x 2.3 x 1.5 cm (5.5 x .9 x .55 in.) | 14 x 2.3 x 1.5 cm (5.5 x .9 x .55 in.) | 15 x 2.8 x 1.3 cm (5.9 x 1.1 x .5 in.) | 15 x 2.8 x 1.3 cm (5.9 x 1.1 x .5 in.) | 18.5 x 3.4 x 3.4 cm (7.3 x 1.3 x 1.3 in.) |
| 34 g (1.2 oz) | 34 g (1.2 oz) | 42.5 g (1.5 oz) | 42.5 g (1.5 oz) | 90.7 g (3.2 oz) |
|  |  |  |  |  |

What is TDS?

Total Dissolved Solids (TDS) are the total amount of mobile charged ions, including minerals, salts or metals dissolved in a given volume of water. TDS is expressed in parts per million (ppm) or milligrams per liter (mg/L). TDS includes any inorganic element present other than the pure water molecule (H₂O) and suspended solids. TDS meters are based on Electrical Conductivity (EC).







TDS affects everything that consumes, lives in, or uses water, whether organic or inorganic. While humans prefer low TDS in their drinking water, many species, such as plants and fish, need significantly higher levels. From drinking water to aquarium water or pipes to glass cleaners, it is always crucial to test for TDS or EC to ensure that the water is right for the application.

The U.S. EPA's Maximum Contaminant Level of TDS for human consumption is 500 ppm (mg/L).

Handhelds: pH and ORP

##ติดต่อบริษัท นีโอนิคส์ จำกัด##

Tel: 02-077-7602 หรือ 061-8268939

| | PH-80 | PH-200 | ORP-200 |
|--------------|--|---|---|
| |  |  |  |
| | <ul style="list-style-type: none"> • Low-cost pH tester • Auto calibration • Modern design • Large LCD display • Splashproof housing • Automatic Temperature Compensation (ATC) • Auto-off, data hold & low battery indicator functions • On-screen temperature reading • Factory calibrated to pH 7.0 • Includes batteries, pH 7.0 buffer, and electrode storage solution | <ul style="list-style-type: none"> • Measures pH and Temperature • Auto-ranging single point calibration with digital fine tuning to any point • Includes electrode storage solution in cap • Large LCD display • Waterproof housing (IP67) • Automatic Temperature Compensation • Auto-off, data hold, low battery indicator and onscreen diagnostic functions • Replaceable sensor • Factory calibrated to pH 7.0 • Includes lanyard, batteries, pH 7.0 buffer powder packet and storage solution | <ul style="list-style-type: none"> • Measures ORP and Temperature • Digital calibration by push button • Platinum sensor and glass reference cell • Large LCD display • Waterproof housing (IP67) • Automatic Temperature Compensation • Auto-off, data hold & low battery indicator functions • Replaceable sensor • Factory calibrated to +200mV • Includes lanyard, batteries and extra storage solution |
| RANGE | 0.0 - 14.0 pH | 0.00 - 14.00 pH | -999 to +1000 mV |
| TEMP. RANGE | 1-80°C (33-176°F) | 1-80°C (33-176°F) | 1-80°C (33-176°F) |
| RESOLUTION | 0.1 pH; 0.1°C/F | 0.01 pH; 0.1°C/F | 1 mV; 0.1°C/F |
| ACCURACY | +/- 2% | +/- .02 pH | 0.5% (+/- 2mV) |
| CALIBRATION | Automatic digital calibration to 4.0, 7.0 or 10.0 | Auto-ranging to 4, 7 or 10 pH, digital fine tuning | Digital calibration by push button |
| ELECTRODE | Glass sensor and reference tube | Replaceable glass sensor and reference tube | Replaceable platinum sensor and glass ref. tube |
| HOUSING | Splashproof | Waterproof (IP67; floats) | Waterproof (IP67; floats) |
| POWER SOURCE | 1 x 3V button cell batteries (included) | 3 x 1.5V button cell (included) | 3 x 1.5V button cell batteries (included) |
| DIMENSIONS | 15.3 x 3.2 x 1.8 cm (6.0 x 1.3 x 0.7 in) | 18.5 x 3.4 x 3.4 cm (7.3 x 1.3 x 1.3 in) | 18.5 x 3.4 x 3.4 cm (7.3 x 1.3 x 1.3 in) |
| WEIGHT | 53.9 g (1.9 oz) | 96.4 g (3.4 oz) | 96.4 g (3.4 oz) |
| |  |  |  |

*Available spring 2011

What is ORP?

ORP (Oxidation Reduction Potential), or Redox, is a measurement of water's ability to oxidize contaminants.

The higher the ORP, the greater the number of oxidizing agents.

Handhelds: Temperature and Salt



TM-1



- Industrial grade digital thermometer
- Heavy duty thermometer measures solids, liquids or gases
- Long probe with extended cable
- Includes convenient wallet-style carrying case

SB-1000 (High Range Salt Meter)



- Salt meter with measuring spoon (percentage of salt)
- Ideal for pools, saltwater aquariums and food preparation
- Extra wide range
- Large LCD display - horizontal angle for easy viewing
- Waterproof housing
- Automatic Temperature Compensation

| | | |
|--------------|--|--|
| RANGE | | 0.0 - 10%; 0.0 - 100 ppt |
| TEMP. RANGE | -50 to 250°C (-58 to 482°F) | 1 to 99°C (33 to 211°F) |
| RESOLUTION | 0.1°C/F | 0.1%; 0.1 ppt; Temperature resolution is 0.1°C/F |
| ACCURACY | ±1°C (-10 to 100°C), ±2°C (101 to 200°C), ±3°C (-50 to -10°C), ±5°C (200 to 250°C) | +/- 0.1%; Temperature accuracy is +/-1°C |
| CALIBRATION | Analog | Digital calibration by push button |
| ELECTRODE | 6.35 cm (2-1/2") stainless steel probe with 50.8 cm (20") cable | Platinum electrodes in measuring spoon |
| HOUSING | Splashproof, enclosed in wallet-style case | Waterproof (submersible; floats) |
| POWER SOURCE | 2 x 1.5V button cell batteries (included) | 3 x 1.5V button cell batteries (included) |
| DIMENSIONS | 5.4 x 10.8 x 1.2 cm (2.1 x 4.2 x .5 in) | 18.5 x 3.4 x 3.4 cm (7.3 x 1.3 x 1.3 in) |
| WEIGHT | 85.4 g (3 oz) | 82.2 g (2.9 oz) |

Tips For Better Water Testing





- Always consult the instruction manual prior to use.
- Always be sure an instrument is properly calibrated. ORP and pH meters need to be calibrated frequently. TDS and EC meters will retain their calibration longer.
- HM Digital meters are factory calibrated as a convenience for the customer. Recalibration may be required.
- Never touch a sensor pin, electrode or reference cell. Skin oils will affect readings.
- Always lightly swirl a meter in the water to dislodge any trapped air bubbles.
- There are many factors that affect water testing, such as water pressure and static electricity. Minor fluctuations or discrepancies in readings are normal.
- Never store an instrument in high heat or humidity.

##ติดต่อบริษัท นี โอนิกส์ จำกัด##

Tel: 02-077-7602 หรือ 061-8268939



Monitors






| | QC-1 | SM-1 | DM-1 | DM-2 |
|---------------------|---|--|--|--|
| | Quick Check Monitor  | Single TDS Monitor  | Dual TDS Monitor  | Dual TDS Monitor  |
| | <ul style="list-style-type: none"> • With the push of a button, the unit displays a green or red light, indicating good water quality or that service is required, respectively • Tests for TDS or conductivity levels • Eight programmable set points (by dip switch) • Bright LED lights • Installs quickly and easily. Simple to use • Comes equipped with 1/4" T-fitting (also available with 3/8" or 1/2") | <ul style="list-style-type: none"> • Displays the TDS level of a single water line • Works with the push of a button • Auto-off function conserves battery power; unit shuts off automatically after 10 minutes of non-use • Comes equipped with 1/4" T-fitting (also available with 3/8" or 1/2") | <ul style="list-style-type: none"> • Displays TDS levels of the feed water and product water with in & out sensors • A crucial device for any water filter system • Great instant check for system performance • Comes equipped with 1/4" T-fittings (also available with 3/8" or 1/2") • Installs in minutes | <p>All the benefits of the DM-1, plus:</p> <ul style="list-style-type: none"> • A large, easy-to-read LCD display • Splashproof housing • Shielded, water-resistant cables • Sliding bracket with variable mounting options • Sleek design • Longer sensor cables |
| RANGE | 0-5000 ppm (0-9999 μ S) | 0-9990 ppm | 0-9990 ppm | 0-9990 ppm |
| ACCURACY | +/- 3% | +/- 2% | +/- 2% | +/- 2% |
| RESOLUTION | n/a | 1 ppm | 1 ppm | 1 ppm |
| ATC | n/a | Yes (1 - 65°C) | Yes (1 - 65°C) | Yes (1 - 65°C) |
| CALIBRATION | Factory calibrated only | Analog to any point | Analog to any point | Analog to any point |
| SET POINT | Eight options (max 50 ppm / 100 μ S) | n/a | n/a | n/a |
| ALARM | Red/green light (no audible alarm) | n/a | n/a | n/a |
| SENSOR | 1/4" with T-fitting | 1/4" with T-fitting | 2 x 1/4" with T-fittings | 2 x 1/4" with T-fittings |
| SENSOR CABLE LENGTH | 62.2 cm (24.5") shielded cable | 62.2 cm (24.5") shielded cable | 62.2 cm (24.5") | 116.8 cm (46") shielded cable |
| POWER SOURCE | 4 x 1.5V button cell (included) | 2 x 1.5V button cell batteries (incl.) | 2 x 1.5V button cell batteries (incl.) | 2 x AA batteries |
| BATTERY LIFE | Approx. 1 year | Approx. 1,000 hours of usage | Approx. 1,000 hours of usage | Approx. 750 hours of usage |
| DIMENSIONS | 7.6 x 2 x 4.7 cm (3 x .8 x 1.9 in) | 7.6 x 2 x 4.7 cm (3 x .8 x 1.9 in) | 7.6 x 2 x 4.7 cm (3 x .8 x 1.9 in) | 11.6 x 6.8 x 1.8 cm (4.6 x 2.6 x .7 in) |
| WEIGHT | 39.7 g (1.4 oz) | 79.4 g (2.8 oz) | 79.4 g (2.8 oz) | 201.3 g (7.1 oz) |

ติดต่อบริษัท เนโอเนิกส์ จำกัด

Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th



| FM-1 | FM-2 | PM-1 & PM-2 | SM-50 | BM-1 |
|---|---|---|--|--|
| Filter Monitor (Timer) | Filter Monitor (Timer and Volumizer) | Purity Monitor | TDS Monitor/Alarm | Bracket Monitor |
|  |  |  |  |  |
| <ul style="list-style-type: none"> 5-stage filter monitor with 5 independent timers and a tri-color LED faucet indicator disc Ideal for multi-stage RO systems Auto-off function conserves batteries Timer counts down in months or days (programmable) Innovative design is perfect for any kitchen | <ul style="list-style-type: none"> 5-stage filter monitor with 5 independent timers and volumizers LED faucet indicator disc Measures time and volume for up to 5 stages Auto-off function conserves batteries Timer counts down in months or days (programmable) Volumizer counts up in gallons or liters (programmable) Modern design is perfect for any kitchen | <ul style="list-style-type: none"> PM-1: OEM single line internal TDS monitor. PM-2: External single line TDS monitor. Includes a light and optional alarm that alerts the user service is required when the TDS level reaches the set-point User-defined set points Red or yellow warning lights Audible alarm (steady beep) | <ul style="list-style-type: none"> AC-powered single TDS/EC monitor with alarm and warning light Programmable TDS/EC set point activates the alarm and light On-screen temperature display NaCl or "442" conversion factors Uses SP-1-PSC sensor SM-40 (future model) uses 1/4" sensor | <ul style="list-style-type: none"> Bracket monitor for DI systems Mounts to a 2" diameter pole Monitors TDS and month timer Green light indicates OK Yellow or red light and alarm will activate if TDS reaches the set point or timer elapses Ideal for dental offices or other applications with pole-mounted systems Also available without bracket (open circuit board) |
| 0-999 days/months | 0-999 days/months; 0-99999 g/l | 0-200 ppm | 0-4995 ppm / 0-9999 μ S; 1 - 80°C | 0-200 ppm; 3-12 months |
| +/- 1% at typical pressure | +/- 1% at typical pressure | +/- 2% | +/- 2% | +/- 2% |
| 1 day/month | 1 day/month; 1 gallon/liter | n/a | 1 ppm/ μ S | n/a |
| n/a | n/a | Yes (1 - 65°C) | Yes (1 - 65°C) | Yes (1 - 65°C) |
| n/a | n/a | Factory calibrated only | Digital to any point | Factory calibrated only |
| Fully programmable | Fully programmable | Set by dip switch | Fully programmable | Set by dip switch (TDS and months) |
| Steady beep | Steady beep | Lights and audible alarm | Beeps for 20 secs every 10 min. | Tri-color light and audible alarm |
| Flow switch (1/4" quick connect) | Flow sensor (1/4" quick connect) | 1/4" with T-fitting | 1/2" NPTF | 1/4" |
| 93 cm (36.6 in) | 93 cm (36.6 in) | 62.86 cm (24.75") shielded cable | 3 m (9.8 ft) shielded cable | Customizable |
| 2 x AA (included) | 2 x AA (included) | AC 110V / 220V | AC 110V / 220 V | AC 110V / 220 V |
| Approx. 18 months | Approx. 18 months | n/a | n/a | n/a |
| 10 x 6.3 x 2.3 cm (4 x 2.5 x 0.9 in) | 10 x 6.3 x 2.3 cm (4 x 2.5 x 0.9 in) | 9.1 x 7.1 x 4 cm (3.6 x 2.8 x 1.6 in) | 17 x 12 x 5.5 cm (6.7 x 4.7 x 2.2 in) | 10.1 x 6.4 x 6.4 cm (4 x 2.5 x 2.5 in) |
| 119 g (4.2 oz) incl. batteries | 119 g (4.2 oz) incl. batteries | 275 g (9.7 oz) | Approx. 250 g (8.8 oz) | Approx. 250 g (8.8 oz) |

*Available mid 2010


*Available mid 2010



Controllers

| | PS-100 | PC-100 | PS-200 |
|---------------|--|--|---|
| |  |  |  |
| | <p>ONE TDS LINE, SINGLE SCREEN</p> <ul style="list-style-type: none"> The fully adjustable relay control is set by the user to automatically stop a pump or valve if the TDS level rises above the setting Stainless steel electrode Includes all parts at no extra cost | <p>ONE EC LINE, SINGLE SCREEN</p> <ul style="list-style-type: none"> The fully adjustable relay control is set by the user to automatically stop a pump or valve if the EC level rises above the setting Stainless steel electrode Includes all parts at no extra cost | <p>TWO TDS LINES, SINGLE SCREEN</p> <ul style="list-style-type: none"> Monitors two lines, controls one The fully adjustable relay control is set by the user to automatically stop a pump or valve if the TDS level rises above the setting Stainless steel electrode Includes all parts at no extra cost |
| TDS RANGE | 0-999 ppm (mg/L) | 0-999 μ S | 0-999 ppm (mg/L) |
| ACCURACY | +/- 2% | +/- 2% | +/- 2% |
| RESOLUTION | 1 ppm | 1 μ S | 1 ppm |
| ATC | Yes (1 - 65°C) | Yes (1 - 65°C) | Yes (1 - 65°C) |
| CALIBRATION | Analog to any point | Analog to any point | Analog to any point |
| SETTING | On-screen buttons | On-screen buttons | On-screen buttons |
| RELAY CONTROL | Simple switch, user-defined set point | Simple switch, user-defined set point | Simple switch, user-defined set point |
| ALARM | Optional setting | Optional setting | Optional setting |
| DISPLAY | Bright 5/8" L.E.D. display | Bright 5/8" L.E.D. display | Bright 5/8" L.E.D. display |
| PROBES | 1/2" NPTF, 3 m (9.8 ft.) cable | 1/2" NPTF, 3 m (9.8 ft.) cable | 1/2" NPTF, 3 m (9.8 ft.) cable |
| POWER SUPPLY | AC 110V / 220V | AC 110V / 220V | AC 110V / 220V |
| DIMENSIONS | 7.1 x 7.1 x 11.1 cm (2.8 x 2.8 x 4.4 in.) | 7.2 x 7.2 x 10.2 cm (2.8 x 2.8 x 4 in.) | 7.2 x 7.2 x 10.2 cm (2.8 x 2.8 x 4 in.) |
| WEIGHT | 453 g (1.0 lbs) | 476 g (1.05 lbs) | 476 g (1.05 lbs) |

Protective cover also available (model CC-1)

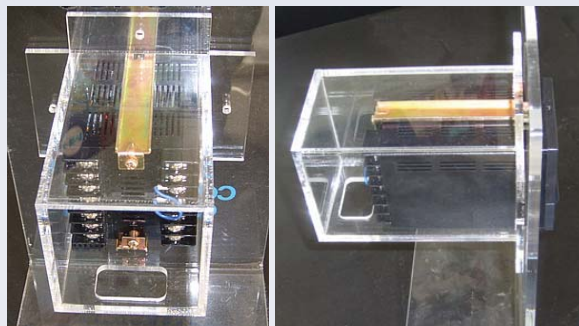

All HM Digital controllers include a TDS/EC sensor(s).

The *SP-1* sensor is compatible with:
PS-100, PS-200, PS-202, PC-100

The *SP-1-PSC* sensor is compatible with:
PSC-150, PSC-154, CIC-152

Throughout 2010, HM Digital will be upgrading the housing on all controllers but the PS-202. The new housing dimensions are 7.1 x 7.1 x 11.1 cm.

ติดต่อบริษัท เนอนิคส์ จำกัด

Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th








| PS-202 | PSC-150 | PSC-154 | CIC-152 |
|---|---|--|--|
| | | | |
| TWO TDS LINES, DUAL DISPLAY <ul style="list-style-type: none"> Ideal for commercial RO systems Monitors and controls two lines simultaneously Two fully adjustable relay controls are set by the user to automatically stop a pump or valve if the TDS levels rise above a setting Stainless steel electrodes (2 sensors) Includes all parts at no extra cost | ONE TDS/EC LINE, SINGLE SCREEN <ul style="list-style-type: none"> Extended range for TDS and EC On-screen temperature display Digital calibration The fully adjustable relay control is set by the user to automatically stop a pump or valve if the level rises above the setting Stainless steel electrode Includes all parts at no extra cost | ONE TDS/EC LINE, SINGLE SCREEN, 4-20mA OUTPUT <ul style="list-style-type: none"> Extended range for TDS and EC 4-20mA output signal On-screen temperature display Digital calibration The fully adjustable relay control is set by the user to automatically stop a pump or valve if the level rises above the setting Stainless steel electrode Includes all parts at no extra cost | ONE TDS/EC LINE, SINGLE SCREEN DUAL DOSING CONTROL <ul style="list-style-type: none"> Extended range for TDS and EC Two set points to control a range Two alarms (max. and min.) On-screen temperature display Digital calibration Upper limit and lower level set points to control two devices, such as a pump and solenoid valve Stainless steel electrode Includes all parts at no extra cost |
| 0-999 ppm (mg/L) | 0-5000 ppm (mg/L); 0-9999 μS | 0-5000 ppm (mg/L); 0-9999 μS | 0-5000 ppm (mg/L); 0-9999 μS |
| +/- 2% | +/- 2% | +/- 2% | +/- 2% full scale |
| 1 ppm | 0-999: 0.1 ppm/ μS ; 1000-9999: 1 ppm/ μS | 0-999: 0.1 ppm/ μS ; 1000-9999: 1 ppm/ μS | 0-999: 0.1 ppm/ μS ; 1000-9999: 1 ppm/ μS |
| Yes (1 - 65°C) | Yes (1 - 65°C) | Yes (1 - 65°C) | Yes (1 - 65°C) |
| Analog to any point | Digital to any point | Digital to any point | Digital to any point |
| On-screen buttons | On-screen buttons | On-screen buttons | On-screen buttons |
| Simple switch, user-defined set point | Simple switch, user-defined set point | Simple switch, user-defined set point | Two (upper limit and lower level) |
| Optional setting | Optional setting | Optional setting | Two independent alarms (max. and min.) |
| Bright 5/8" L.E.D. display | Bright, tri-color 5/8" L.E.D. display | Bright, tri-color 5/8" L.E.D. display | Bright, tri-color 5/8" L.E.D. display |
| 2 x 1/2" NPTF, 3 m (9.8 ft.) cable | 1/2" NPTF, 3 m (9.8 ft.) cable | 1/2" NPTF, 3 m (9.8 ft.) cable | 1/2" NPTF, 3 m (9.8 ft.) cable |
| AC 110V / 220V | AC 110V / 220V | AC 110V / 220V | AC 110V / 220V |
| 9.4 x 9.4 x 12.5 cm (3.7 x 3.7 x 4.5 in.) | 7.2 x 7.2 x 10.2 cm (2.8 x 2.8 x 4 in.) | 7.2 x 7.2 x 10.2 cm (2.8 x 2.8 x 4 in.) | 7.1 x 7.1 x 11.1 cm (2.8 x 2.8 x 4.4 in.) |
| 569 g (1 lb 4.1 oz) | 453 g (1.0 lbs) | 453 g (1.0 lbs) | 453 g (1.0 lbs) |

ติดต่อบริษัท เนโอเนิกส์ จำกัด




Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th



| TDS/EC | | | | |
|---|--|--|---|---|
| SP-1/SP-1-PSC | SP-2 | SP-3 | SP-4 | SP-5 |
|  |  |  |  |  |
| TDS/EC Sensor Probe for Panel Mounted Controllers <ul style="list-style-type: none"> • High quality, durable plastic construction • Stainless steel sensors • Probe: 1/2" threaded NPTF (detachable) • Cable: 3 meter (9.8 ft) shielded cable • Connector: 4-pin • Thermistor: Yes | Dual TDS Sensor Probes for DM-1 <ul style="list-style-type: none"> • Stainless steel sensors • Probe: 1/4" • Cable: 62.24 cm (24.5") • Connector: 8-pin • Thermistor: Yes • Sensors have blue or red wrap labeled IN or OUT | Dual TDS Sensor Probes for DM-2 <ul style="list-style-type: none"> • Stainless steel sensors • Probe: 1/4" • Cable: 114.3 cm (45") shielded • Connector: Dual 4-pin • Thermistor: Yes • Sensors have blue or red wrap labeled IN or OUT | Dual TDS Sensor Probes <ul style="list-style-type: none"> • Stainless steel sensors • Probe: 1/4" • Cable: 62.24 cm (24.5") • Connector: Dual 4-pin • Thermistor: No • Sensors have blue or red wrap labeled IN or OUT | Single TDS Sensor Probe <ul style="list-style-type: none"> • Stainless steel sensors • Probe: 1/4" • Cable: 114.3 cm (45") shielded • Connector: 4-pin • Thermistor: Yes • Sensors have unlabeled green wrap |

Calibration Solutions and Buffers: TDS, EC, pH, ORP






| C-342/C-1000 | PH-BUF | ORP-BUF |
|---|--|--|
|  <ul style="list-style-type: none"> • NaCl calibration solution • Available in 342 ppm or 1000 ppm • Comes in lightweight HDPE plastic bottles 3oz. (88.7 mL) • Sealed with a coated foam liner <p>Solution Equivalents</p> <p>342 NaCl = 362 as KCl; 478 as "442"; 700 μs</p> <p>1000 NaCl = 1060 as KCl; 1450 as "442"; 2000 μs</p> |  <ul style="list-style-type: none"> • Variety pack of pH buffer solution. • Powder has an indefinite shelf life. • Make only what you need, when you need it. <p>SPECIFICATIONS</p> <ul style="list-style-type: none"> • Total volume: 1.2 liters (100 ml per packet) • Contents: 3 packets of 4.0 pH, 6 packets of 7.0 pH, 3 packets of 10.01 pH • Includes 1 empty 100 ml bottle • Accuracy: +/- 0.02 pH at 25° C |  <ul style="list-style-type: none"> • Variety pack of ORP buffer solution. • Includes test kit to check the quality of your ORP electrode • Simple to use. <p>SPECIFICATIONS</p> <ul style="list-style-type: none"> • Total volume: 1.0 liters. (100 ml per packet) • Contents: 5 packets of +92mV, 5 packets of +265 mV • Includes 3 x 100 ml bottles • Accuracy: +/- 0.2 ORP at 25° C |

What is pH?

pH (potential of hydrogen) is an indication of a substance's acid or alkaline properties.

The higher the pH, the more base it is, and the lower the pH, the more acidic it is. A pH level of 7.0 is neutral.

Sensors and Calibration

| Replacement Probes | | | Flow | |
|---|--|--|--|---|
| SP-C1 | SP-P2 | SP-O2 | FMS-1 | FMS-2 |
|  |  |  |  |  |
| COM-100 Replacement Probe <ul style="list-style-type: none"> Platinum sensors Thermistor Easy assembly Meter must be calibrated after attaching new sensor | PH-200 Replacement Probe <ul style="list-style-type: none"> Glass sensor and reference tube, thermistor Includes storage solution Easy assembly Meter must be calibrated after attaching new sensor | ORP-200 Replacement Probe <ul style="list-style-type: none"> Platinum sensor and glass reference tube, thermistor Includes storage solution Easy assembly Meter must be calibrated after attaching new sensor | Water Flow Switch <ul style="list-style-type: none"> Operates a device based on water flow with a simple switch 1/4" quick-connect fittings Modular connector plug Durable design | Flow Sensor (Volumizer) <ul style="list-style-type: none"> Turbine based sensor Measures volume 1/4" quick-connect fittings Modular connector plug Durable design |

About Calibration

A scientific instrument must be calibrated to achieve accurate testing results.

All HM Digital meters come factory calibrated and are ready to use out of the box in most instances. They are designed to stay consistent and retain their calibration. However, factory calibration is done as a convenience for the user, and there will be times when it is necessary to recalibrate a meter. A pH or ORP meter should be calibrated regularly, while a TDS or EC meter will retain its calibration for a considerably longer time. Additionally, calibration changes may occur during shipping or as a result of improper care. Always consult the instructions for a specific meter regarding calibration. The only way to determine if a meter has been calibrated properly is to check it against a laboratory-certified calibration solution or buffer.

HM Digital products are calibrated to specific points for the most common usages, depending upon the product. While factory calibration is suitable for most applications, there are many applications for which recalibration will be necessary to achieve improved accuracy. A meter should always be calibrated as close as possible to the level that will be tested. If testing a range with a single meter (such as RO water and tap water), the meter should be calibrated in the upper third of that range.

If calibrating a TDS meter, always ensure the EC-to-TDS conversion factor of the meter matches the calibration solution type.

ติดต่อบริษัท เน โอนิกส์ จำกัด

Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th



HM Digital, Inc. is your premier source for the finest quality water testing instrumentation. From our facilities in Los Angeles, Seoul and Qingdao, HM Digital ships to anywhere in the world.

Our handheld meters, in-line monitors, controllers, sensors and calibration solutions, used in a myriad of applications, are superior in quality, features and performance, yet made available at a very economic cost. HM Digital takes pride not only in the quality of our products, but also in our commitment to customer service and the shortest lead times in the industry.

With HM Digital water testing instruments, you're on your way to the perfect water.


Testing Instruments for Professional and Personal Use



- | | | |
|------------------------------------|----------------------------------|-------------------------------------|
| Agriculture | Deionization | Pharmaceutical & Medical |
| Alternative Health | Distillation | Reverse Osmosis |
| Aquariums & Aquaculture | Food & Coffee Service | Water Bottling |
| Car & Window Washing | Hydroponics | Water Purification |
| Carbon Filtration | Pools & Spas | Water Treatment |

RECOMMENDED TDS LEVELS FOR DRINKING WATER

TDS in parts per million (PPM)

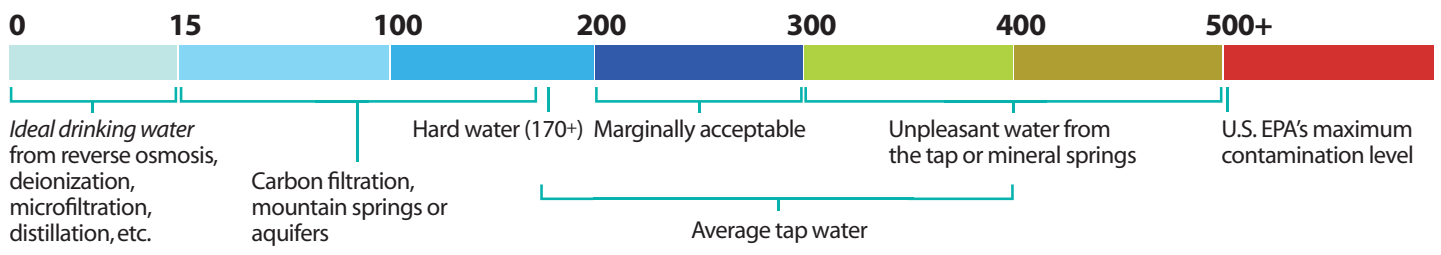

How Pure is Your Water?®



ติดต่อบริษัท เนโอเนิกส์ จำกัด
 Tel: 02-077-7602 หรือ 061-8268939
 E-mail: sale@neonics.co.th หรือ sale@tools.in.th



patents held & pending
 An ISO 9001 certified company