


## Infrared Thermometer



**GM1850**



**GM2200**

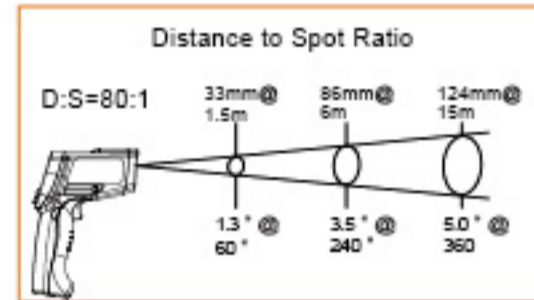

GM1850/GM2200

Technical indicators	GM1850	GM2200
Measuring range	200~1850°C (392~3362°F)	200~2200°C (392~3992°F)
Precision	±1.5% or ±1.5°C	±1.5% or ±1.5°C
Repetitive	1% or 1°C	1% or 1°C
Distance Spot Ratio	80:1	80:1
Emissivity	0.1~1.0 Ajustable	0.1~1.0 Ajustable
Repeatability	0.1°C/0.1°F	0.1°C/0.1°F
Response Time	500ms	500ms
Wavelength	900-1700nm	900-1700nm
<b>Peculiarity</b>		
MAX/MIN/AVG/Yi-Xi	√	√
°C/°F Selection	√	√
Keep data display	√	√
Locate laser on/off	√	√
Backlight ON/OFF	√	√
Measurement data stored	√	√
High/low temperature alarm	√	√
RS232 interface	√	√
Auto power-off	√	√
<b>Conventional</b>		
Power supply	9V batteries	
Product size	200*141*60mm	
Product weight	315g ( +batteries )	

 **CAUTION** LASER RADIATION. DO NOT STARE INTO BEAM. CLASS II LASER PRODUCT.

ติดต่อ  
บริษัท เน็โอนิกส์ จำกัด  
โทร 02-077-7602 หรือ 061-8268939 E-  
mail:sale@neonics.co.th

LINE ID:neonicstool

