



Infrared Thermometer

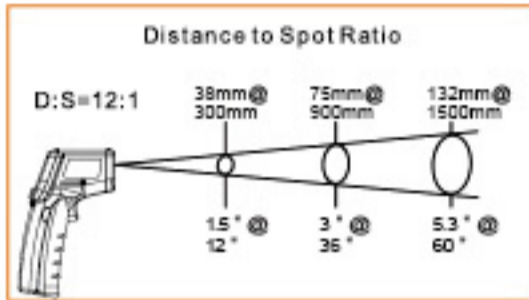

GM530

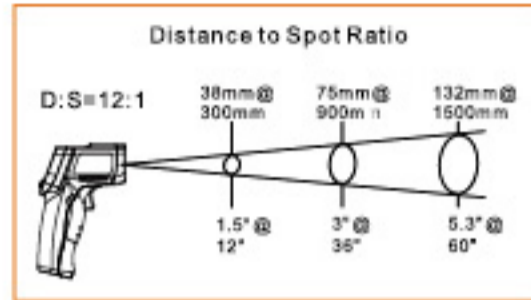

GM330/GM550

This unit consist of Optics, Temperature Sensor Signal amplifier, Processing circuit and LCD Display. The Optics collected the infrared energy emitted by object and focus onto the Sensor. Then the sensor translates the energy into an electricity signal. This signal will be turned out to be digital shown on the LCD after the signal amplifier and processing circuit.

Technical indicators	GM300	GM550
Measuring range	-50~420°C (-58~788°F)	-50~550°C (-58~1022°F)
Precision	±1.5%or±1.5°C	±1.5%or±1.5°C
Repetitive	1% or 1°C	1% or 1°C
Distance Spot Ratio	12:1	12:1
Emissivity	0.95	0.95
Repeatability	0.1°C/0.1°F	0.1°C/0.1°F
Response Time	500ms	500ms
Wavelength	8-14μm	8-14μm
Peculiarity		
°C/°F Selection	√	√
Keep data display	√	√
Locate laser on/off	√	√
Backlight ON/OFF	√	√
Auto power-off	√	√
Conventional		
Power supply	9V batteries	9V batteries
Product size	153*43*101mm	153*43*101mm
Product weight	164.5g(+batteries)	164.5g(+batteries)



GM300



GM550

CAUTION LASER RADIATION. DO NOT STARE INTO BEAM. CLASS II LASER PRODUCT.

กรุณาติดต่อ
บริษัท เนโอเนิกส์ จำกัด
โทร 02-077-7602 หรือ 061-8268939
E-mail:sale@neonics.co.th

LINE ID:neonicstool

