


## Infrared Thermometer



GM500/GM700/GM900

Technical indicators	GM500	GM700	GM900
Measuring range	-50~550°C (-58~1022°F)	-50~750°C (-58~1382°F)	-50~950°C (-58~1742°F)
Precision	±1.5%or±1.5°C	±1.5%or±1.5°C	±1.5%or±1.5°C
Repetitive	1% or ±1°C	1% or 1°C	1% or 1°C
Distance Spot Ratio	12:1	12:1	12:1
Emissivity	0.1~1.0 Ajustable	0.1~1.0 Ajustable	0.1~1.0 Ajustable
Repeatability	0.1°C/0.1°F	0.1°C/0.1°F	0.1°C/0.1°F
Response Time	500ms	500ms	500ms
Wavelength	8-14µm	8-14µm	8-14µm
<b>Peculiarity</b>			
MAX/MIN/AVG/Yi-Xi	√	√	√
°C/°F Selection	√	√	√
Keep data display	√	√	√
Locate laser on/off	√	√	√
Backlight ON/OFF	√	√	√
High/low temperature alarm	√	√	√
Auto power-off	√	√	√
<b>Conventional</b>			
Power supply	9V batteries		
Product size	172*50*111mm		
Product weight	220g (+batteries)		

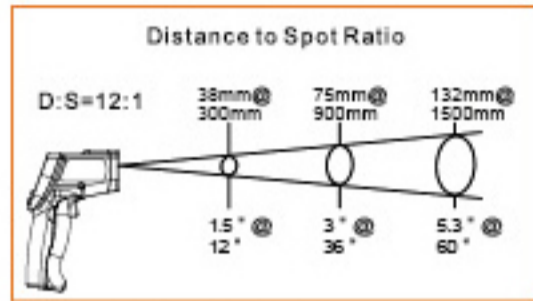

GM500



GM700



GM900

**CAUTION** LASER RADIATION. DO NOT STARE INTO BEAM. CLASS II LASER PRODUCT.

กรุณาติดต่อ  
บริษัท เนโอเนิกส์ จำกัด  
โทร 02-077-7602 หรือ 061-8268939  
E-mail:sale@neonics.co.th

LINE ID:neonicstool

